

CERTIFICATE OF APPROPRIATENESS

Application Date: August 5, 2015

Applicant: Lauren Olmsted, owner

Property: 828 W Cottage Street, Lot 3, Block 221, East Norhill Subdivision. The property includes a historic 1,128 square foot, one-story wood frame single-family residence and a detached garage situated on a 5,512 square foot interior lot.

Significance: Contributing bungalow residence, constructed circa 1925, located in the Norhill Historic District.

Proposal: Alteration – Replace non-original front porch columns with tapered wood columns on brick pedestals and install brick wing walls alongside the front steps
See enclosed application materials and detailed project description on p. 5-8 for further details.

Public Comment: No public comment received.

Civic Association: No comment received.

Recommendation: Approval
HAHC Action: Approved

All materials in exterior walls, including windows, siding, framing lumber, and interior shiplap must be retained except where removal or replacement has been explicitly approved by HAHC. Shiplap is an integral structural component of the exterior wall assembly in balloon framed structures and its removal can cause torqueing, twisting and collapse of exterior walls. Shiplap may be carefully shored and removed in small portions to insulate, run wire or plumbing, and should be replaced when the work is complete. Maintenance and minor in-kind repairs of exterior materials may be undertaken without HAHC approval, but if extensive damage of any exterior wall element is encountered during construction, contact staff before removing or replacing the materials. A revised COA may be required.

CERTIFICATE OF APPROPRIATENESS

Basis for Issuance: HAHC Approval
Effective: August 27, 2015



PLANNING & DEVELOPMENT DEPARTMENT

COA valid for one year from effective date. COA is in addition to any other permits or approvals required by municipal, state and federal law. Permit plans must be stamped by Planning & Development Department for COA compliance prior to submitting for building or sign permits. Any revisions to the approved project scope may require a new COA.

APPROVAL CRITERIA

ALTERATIONS, REHABILITATIONS, RESTORATIONS AND ADDITIONS

Sec. 33-241(a): HAHC shall issue a certificate of appropriateness for the alteration, rehabilitation, restoration or addition of an exterior feature of (i) any landmark or protected landmark, (ii) any building, structure or object that is contributing to an historic district, or (iii) any building, structure or object that is part of an archaeological site, upon finding that the application satisfies the following criteria, as applicable:

- | S | D | NA | |
|-------------------------------------|--------------------------|-------------------------------------|---|
| | | | S - satisfies D - does not satisfy NA - not applicable |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | (1) The proposed activity must retain and preserve the historical character of the property; |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | (2) The proposed activity must contribute to the continued availability of the property for a contemporary use; |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | (3) The proposed activity must recognize the building, structure, object or site as a product of its own time and avoid alterations that seek to create an earlier or later appearance; |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | (4) The proposed activity must preserve the distinguishing qualities or character of the building, structure, object or site and its environment; |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | (5) The proposed activity must maintain or replicate distinctive stylistic exterior features or examples of skilled craftsmanship that characterize the building, structure, object or site; |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | (6) New materials to be used for any exterior feature excluding what is visible from public alleys must be visually compatible with, but not necessarily the same as, the materials being replaced in form, design, texture, dimension and scale; |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | (7) The proposed replacement of missing exterior features, if any, should be based on an accurate duplication of features, substantiated by available historical, physical or pictorial evidence, where that evidence is available, rather than on conjectural designs or the availability of different architectural elements from other structures; |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | (8) Proposed additions or alterations must be done in a manner that, if removed in the future, would leave unimpaired the essential form and integrity of the building, structure, object or site; |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | (9) The proposed design for any exterior alterations or addition must not destroy significant historical, architectural or cultural material and must be compatible with the size, scale, material and character of the property and the area in which it is located; |
| <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | (10) The setback of any proposed construction or alteration must be compatible with existing setbacks along the blockface and facing blockface(s); |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | (11) The proposed activity will comply with any applicable deed restrictions. |



PROPERTY LOCATION
NORHILL HISTORIC DISTRICT

Building Classification

- Contributing
- Non-Contributing
- Park



INVENTORY PHOTO




CURRENT PHOTO




PROPOSED PORCH ELEVATIONS

NORTH (FRONT)

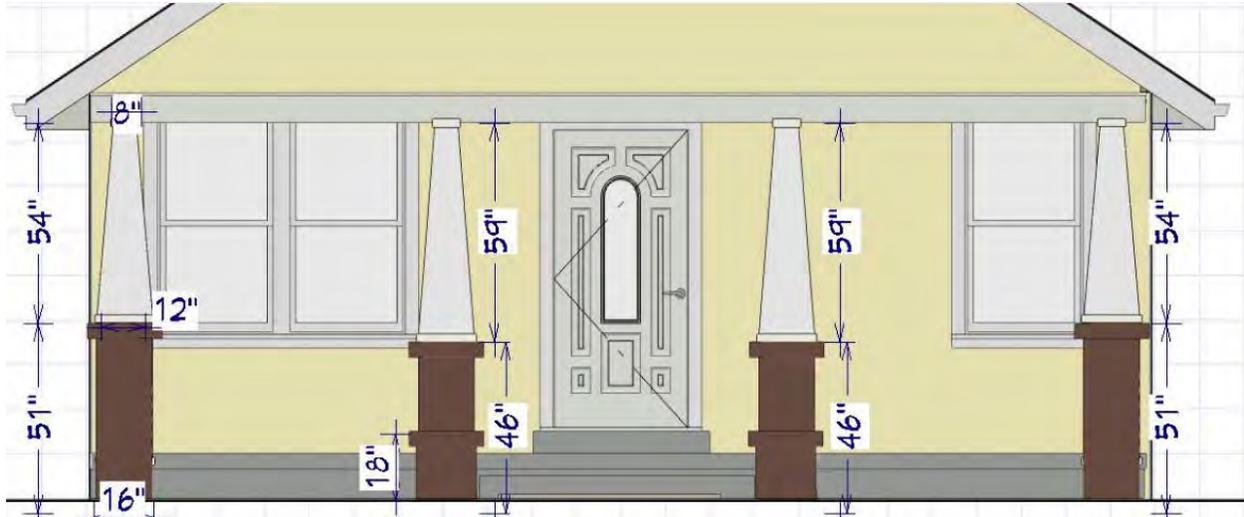


EAST (SIDE)

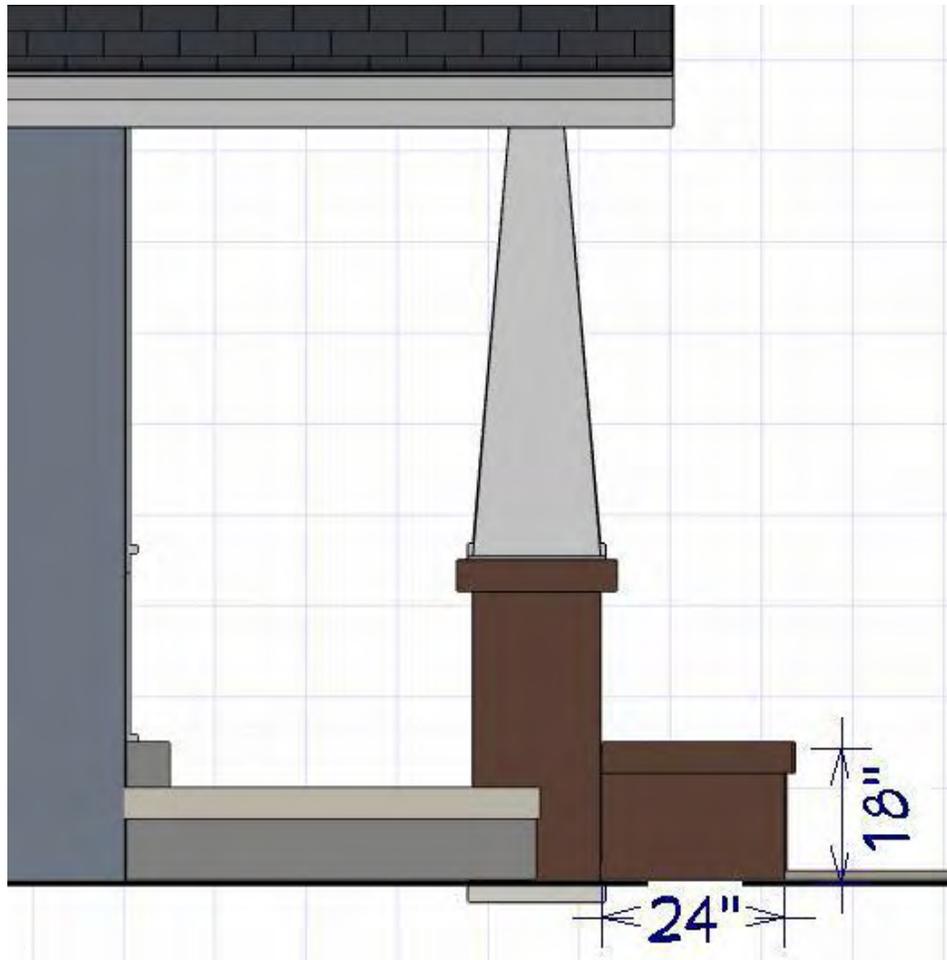

SIMILAR PORCH IN NORHILL HISTORIC DISTRICT

NORHILL BUNGALOW 1

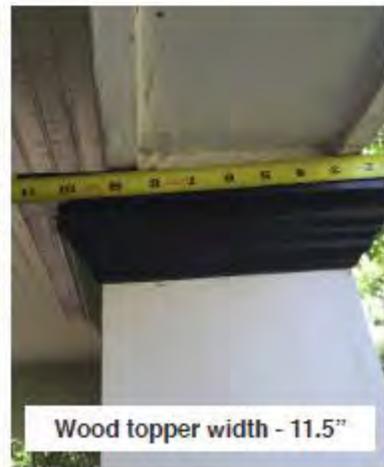

SIMILAR PORCH IN NORHILL HISTORIC DISTRICT

NORHILL BUNGALOW 2



PROJECT DETAILS

Porch: The residence features a non-original concrete front porch with four non-original round columns. The columns will be removed and replaced with tapered wood columns measuring 8" wide at the top and 12" wide at the base on 18" wide brick pedestals. The two inside pedestals will measure 3'-10" in height and the outside pedestals will measure 4'-3". 18" tall brick wing walls will be installed along the existing porch steps.