DEPARTMENT OF PUBLIC WORKS AND ENGINEERING

Zip code: (77028) (77016)

ENGINEERING & CONSTRUCTION DIVISION

WATER MAIN REPLACEMENT, SHADY OAK AREA

S-000035 - 00W6-3

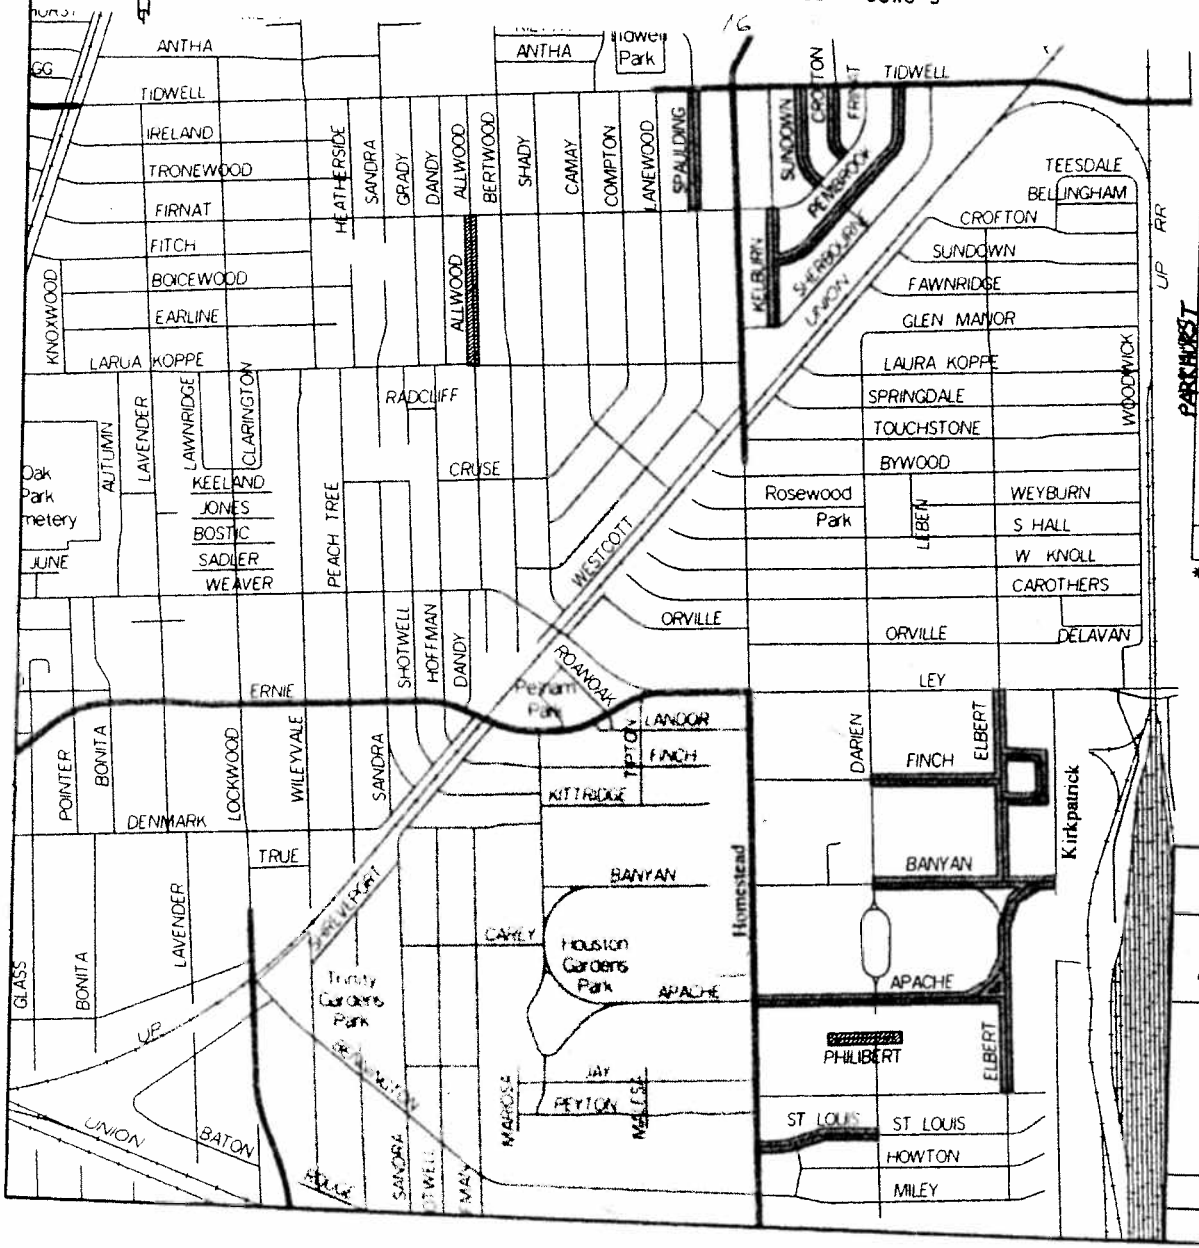

SHADY OAK

STREET NAME	START	END	NEW SIZE (IN)	PIPE LENGTH (FEET)
ALLWOOD	LAURA KOP	FIRNAT	8	1500
SPAULDING	FIRNAT	TIDWELL	8	1300
KELBURN	LEIGHTON	FIRNAT	8	1200
SUNDOWN	FIRNAT	TIDWELL	8	1150
CROFTON	FIRNAT	TIDWELL	8	780
PEMBROOK	KELBURN	TIDWELL	8	2400
PHILIBERT	END	END	8	700
ST. LOUIS	HOMESTEAD	DARIEN	8	1250
APACHE	HOMESTEAD	ELBERT	8	2650
APACHE-1	APACHE	ELBERT	8	600
ELBERT	JAY	BANYAN	8	2450
BANYAN	DARIEN	KIRPATRICK	8	1950
ELBERT	BANYAN	LEY	8	1950
FINCH	DARIEN	ELBERT	8	1400
FINCH	ELBERT	ELBERT	8	1350
TOTAL PIPE LENGTH				22,630

* Note: All lines will be PVC pipe conforming to AWWA C-900 specifications.

KEY MAPS: 454D, 454H, 454M, 454R
GIMS GRID: 5560B, 5560D, 5561C, 5561D

EXHIBIT 2C

CITY OF HOUSTON
DEPARTMENT OF PUBLIC WORKS AND ENGINEERING

DEMOPULOS & FERGUSON ASSOCIATES, INC.
ENGINEERS ■ PLANNERS
2180 NORTH LOOP WEST, SUITE 305 HOUSTON, TEXAS

VICINITY MAP
WATER MAIN REPLACEMENT
SHADY OAK AREA

S-000035-00W6-4

SCALE: NOT TO SCALE | DATE: JUNE 2007