MANGUM MANOR -SOUTH

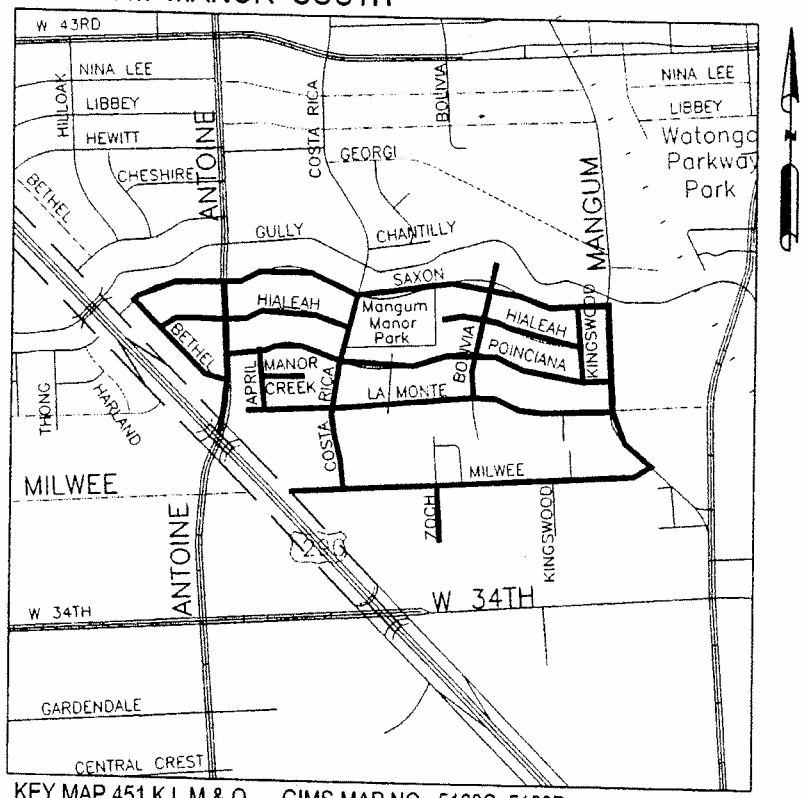

KEY MAP 451 K,L,M & Q GIMS MAP NO. 5160C, 5160D

zip code: 77092

N.T.S.

Street	Start	End	PROPOSED WATER LINE SIZE(IN)					TOTAL PROPOSED LENGTH(LF)
			4"	6"	8"	12"	16"	
SAXON	MANGUM	BETHEL			4,320	90		4,410
HIALEAH	COSTA RICA	BETHEL			1,813			1,813
HIALEAH	BOLIVIA	LOOP			817			817
HIALEAH	KINGSWOOD	BOLIVIA			908			908
POINCIANA	MANGUM	ANTOINE			3,545			3,545
MANOR CREEK	APRIL	LOOP	25		871			896
LA MONTE	MANGUM	APRIL		15	3,193			3,208
LA MONTE	APRIL	LOOP	201		18			219
MILWEE	MANGUM	HWY 290	62		3,207			3,269
BETHEL	ANTOINE	SAXON			1,062			1,062
ANTOINE	SAXON	HWY 290				1,137		1,137
APRIL	LA MONTE	POINCIANA			510			510
COSTA RICA	MILWEE	SAXON			1,795			1,795
ZOCH	MILWEE	CUL-DE-SAC			505			505
BOLIVIA	SAXON	LOOP	137		5			142
BOLIVIA	SAXON	LA MONTE			1,005			1,005
KINGSWOOD	SAXON	POINCIANA			555			555
MANGUM	SAXON	MILWEE	25		25		1,679	1,729
		TOTAL (LF)	450	15	24,154	1,227	1,679	27,525

CITY OF HOUSTON

DEPARTMENT OF PUBLIC WORKS AND ENGINEERING

WATER LINE REPLACEMENT IN
MANGUM MANOR-SOUTH AREA
(WBS NO. S-000035-00M6-4)

APRIL, 2009

OMEGA ENGINEERS, INC.
16350 Park Ten Place Suite 120 Houston, Texas 77084
Tel 281-647-9182 Fax 281-647-9184

VICINITY MAP